



# Simplify Complexity



Web-based Software



Real-time Transactions



Management Dashboard



Comprehensive Reporting



Remote Management and Updates



Rugged and Secure Terminal



Fuels  
Propane  
CNG/LNG  
Lubricants  
Water  
DEF



TEL:+1-604-421-1001  
TOLL-FREE:1-877-421-1001  
EMAIL:INFO@COMPUTROLFUEL.COM  
WWW.COMPUTROLFUEL.COM

## Simcom is simplicity

- Intuitive and comfortable user experience with wizards that guide you step by step
- Dashboard shows critical information at a glance
- Smart terminal with a large color display and alphanumeric keypad
- Powerful and flexible reporting tools as standard features

## Simcom is real-time

- Simcom is securely hosted in the cloud, accessible from any browser, from anywhere, anytime
- Terminals perform real-time authorizations and automatic data synchronization
- Implement business decisions instantly around access, volume and pricing
- Fall-back modes ensure that fueling continues even through communication interruptions


## Simcom is knowledge

- Data-driven operations benefit from real-time knowledge of inventory and activity at all dispensing locations
- Easily manage operator and vehicle accounts, with multiple identification credentials available
- Data is easily viewed and shared with users and systems across the organisation
- Capture important additional data with every dispensing transaction

## Simcom is the future now

- Simcom is remotely configurable with updates delivered effortlessly
- Eliminate manual processes with automated tasks
- New features easily added as your operations grow and needs change
- State of the art security features protect your system and data integrity

## A Complete Management System

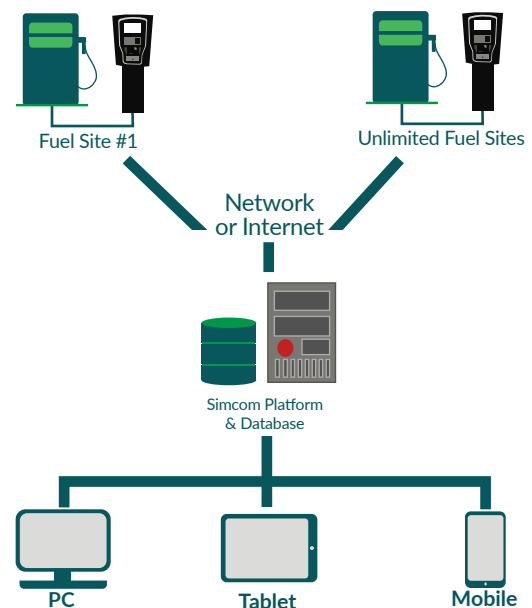

## Specifications

- All major browsers supported
- Platform available as hosted service or installed on-premise
- Microsoft SQL server database
- Dimensions: H 160 cm (63") W 42 cm (16.5") D 30 cm (11.8")
- Weight: 15.4 kg (34 lbs)
- Electrical: 110-120 VAC 50/60 Hz
- Power Consumption: Less than 36 Watts
- Temperature: -40°C (-40°F) to 50°C (120°F) Humidity: 0-95%
- CSA Approved, NEMA R3 rated