

# computrol | SPT1000

24/7  
365

Offer **self-serve, unattended** fuel sales to the general public



Improve your **cash flow** with upfront payments for dispensed products



Sell fuel **on account** to your local customers with house and fleet cards



Attract and keep customers with loyalty cards



Easily **share** account transactions with other systems



Chip and PIN



EMV &  
PCI  
PA-DSS  
compliant

PROFITABLE  
SELF-SERVE  
CONVENIENT



TEL:+1-604-421-1001  
TOLL-FREE:1-877-421-1001  
INFO@COMPUTROLFUEL.COM  
WWW.COMPUTROLFUEL.COM



## An All-In-One System

- Offers multiple convenient payment methods (Visa, Mastercard, AMEX, Interac Debit) for your customers
- Gives you complete control over your remote fueling locations
- Maintains accurate inventory records
- Details daily sales by credit/debit and on account through automated financial and activity reports
- Facilitates quick and easy transactions at large and busy sites, with multiple terminals and up to 16 fuel positions supported
- Easy to remotely manage sites with price changes and card updates
- Easy to retrofit to existing electronic fuel dispensers
- Site operator can reprint receipts


## Included Components

- Large LCD Graphic screen
- Tamper-proof stainless steel keypad
- Chip/Magnetic-stripe card reader
- Thermal receipt printer
- Remote Control Application
- Fleet card management software
- Site Computer and Monitor
- Uninterrupted Power Supply (UPS)

## Safe and Secure

- Credit & debit transactions are highly secure, using the latest banking technology standards (PCI PA-DSS compliant)
- Provides comprehensive on-screen training for users
- The SPT1000 can be used across Canada with multi-lingual instructions in English and French
- Receive prompt notification of issues at your remote sites via automated email
- Operates year-round and in extreme weather conditions with built-in heater
- Protected from local power supply problems by a regulated transformer and uninterrupted power supply

## Fuel Management System

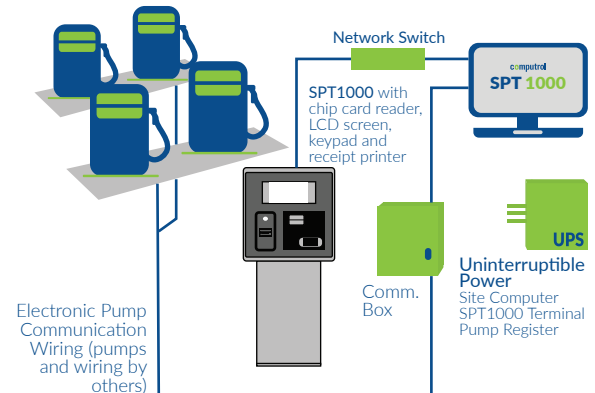

## Specifications

- Dimensions: H 47 cm (18.5") W 35.6 cm (14") D 29.2 cm (11.5"), Pedestal H 140.3 cm (45")
- Weight: 21 kg (47 lbs)
- Electrical: 120 VAC, 60Hz, 5 Amps
- Approval: ELT (Canada/US)
- Operating Temperature: -40C (-40°F) to 45C (110°F) Humidity: 5% to 95% non-condensing
- LED Lighting